

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 03/086783 A1

- (51) International Patent Classification⁷: B60C 9/22
- (21) International Application Number: PCT/US02/10929
- (22) International Filing Date: 8 April 2002 (08.04.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except CA, MX, US): SOCIETE DE TECHNOLOGIE MICHELIN [FR/FR]; 23, rue Breschet, F-63000 Clermont-Ferrand (FR).
- (71) Applicant (for all designated States except US): MICHELIN RECHERCHE ET TECHNIQUE S.A. [CH/CH]; Route Louis-Braille 10 et 12, CH-1763 Granges-Pacot (CH).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): OSBORNE, Daniel,

Grier [US/US]; 845 Westmoreland Road, Greer, SC 29651 (US). BOOZER, Matthew [US/US]; 304 Carson Road, Easley, SC 29642 (US). ESNAULT, Philippe [FR/US]; 9 Fredericksburg Drive, Greenville, SC 29615 (US).


(74) Agent: FARRELL, Martin; Michelin North America, Inc., Intellectual Property Department, P.O. Box 2026, Greenville, SC 29602-2026 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KB, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: PNEUMATIC TIRE CROWN REINFORCEMENT

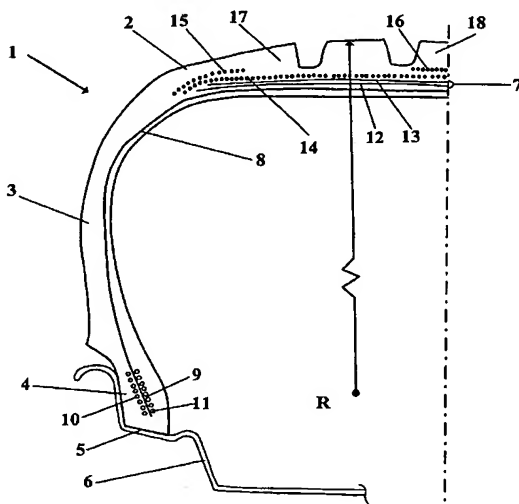

(57) Abstract: A tire comprising a crown extended by two respective sidewalls and two respective beads, a carcass structure anchored in each side of the tire in said beads, said crown comprising at least one reinforcing ply having parallel reinforcements oriented at an angle α relative to the circumferential direction ranging between 10 and 45 degrees, a first crown reinforcement (14, 15) having cords substantially oriented in the circumferential direction and being high elastic modulus at high stress organic fiber cords, and a second crown reinforcement having (16) cords substantially oriented in the circumferential direction and having a ratio τ of the tensile strength at high strain and high temperature to the tensile strength at low strain and moderate temperatures inferior to 1.5.

WO 03/086783 A1



European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

PNEUMATIC TIRE CROWN REINFORCEMENT

BACKGROUND OF THE INVENTION

5 The invention relates to a pneumatic tire for vehicles, in particular a tire the architecture of which is optimized to provide good handling performance while retaining high-speed durability.

The patent application EP 0 790 143 describes a tire comprising a crown extended by two
10 respective sidewalls and two respective beads, a carcass structure anchored in each side of the tire in said beads, said crown comprising at least one reinforcing ply having parallel reinforcements oriented at an angle α relative to the circumferential direction and a first crown reinforcement having cords substantially oriented in the circumferential direction, wherein the first crown reinforcement cords are made of a low elastic modulus
15 organic fiber cord and the crown further comprises a pair of axially spaced edge plies made of high modulus organic fiber cords.

According to this document, the resulting tire has a substantially rounded ground
20 contacting area and, as a consequence, good high-speed durability and handling performance.

It is an object of the invention to provide a tire having an improved control over its crown curvature and its ground contacting area and accordingly, which has improved handling
25 performance while retaining high-speed durability.

BRIEF SUMMARY OF THE INVENTION

According to the present invention, a tire comprises a crown extended by two respective
30 sidewalls and two respective beads, a carcass structure anchored in each side of the tire in said beads, said crown comprising:

- 2 -

- at least one reinforcing ply having parallel reinforcements oriented at an angle α relative to the circumferential direction ranging between 10 and 45 degrees,
 - a first crown reinforcement having cords substantially oriented in the circumferential direction and being high elastic modulus at high stress organic fiber cords; and
 - 5 - a second crown reinforcement having cords substantially oriented in the circumferential direction and the cords having a ratio τ of the tensile strength at high strain and high temperature to the tensile strength at low strain and moderate temperatures inferior to 1.5.
- 10 The ply having parallel reinforcements oriented at an angle α and the first crown reinforcement of the tire are designed in order to provide a very good high-speed (over 250 km/h) durability of the tire. In particular, as shown in Fig. 6, these high modulus at high stress cords prevent the ground contacting area 19 of the tire when running at very high speeds from having a center length C inferior to the shoulder length S. On the other
- 15 hand, the shape of the ground contacting area 20 of the tire of the invention, as illustrated in Fig. 7, stays substantially rectangular or slightly oval. Its center length C' is superior to its shoulder length S'. The second crown reinforcement has the advantage to further flatten the transverse curvature of the outer contour of the crown of the tire when inflated and while running at low and moderate speeds (around and under 150 km/h). This
- 20 provides improved dry handling and wear performances at low and medium speeds. At very high speeds, due to the high loads and stresses on the circumferential cords and due to the high temperature in the crown the effect of the second crown reinforcement in front of the loads supported by the first crown reinforcement is low and becomes nearly negligible. As a consequence, this second crown reinforcement does not significantly
- 25 reduce the center length of the ground contacting area of the tire, which could reduce the high speed limit durability.

Advantageously, the second crown reinforcement cords are such that $\tau < 1.0$ and preferably $\tau < 0.8$. It is very advantageous to choose the cords with the value of τ as low

30 as possible. This allows adjusting nearly independently the properties of the tire at low and moderates speeds and its properties at very high speeds.

According to a first embodiment, the second crown reinforcement is placed axially in the center part of the crown and preferably placed radially outside the first crown reinforcement.

5

In the case in which the crown of the tire has radially outwardly a tread with a pattern comprising a central rib, the second crown reinforcement is preferably placed axially under this rib.

10 According to a second embodiment, the first crown embodiment having two lateral parts, the second crown reinforcement is placed axially between these two axial parts. This embodiment advantageously diminishes the thickness of the crown and accordingly the weight and the rolling resistance of the tire.

15 According to a third embodiment, the cords of the first and second crown reinforcement are alternately placed at substantially the same distance from the axis of rotation of the tire. This embodiment has the advantage to be easy to realize and is less expensive from a manufacturing perspective.

20 According to another embodiments, the at least one reinforcing ply having parallel reinforcements oriented at an angle α relative to the circumferential direction is inserted radially between the first and second crown reinforcements.

The second crown reinforcement can be placed radially inwardly the at least one
25 reinforcing ply having parallel reinforcements oriented at an angle α relative to the circumferential direction. This embodiment has the advantage to improve the handling properties of the tire at low and moderate speeds.

The first crown reinforcement can alternatively be placed radially inwardly the at least
30 one reinforcing ply having parallel reinforcements oriented at an angle α relative to the

- 4 -

circumferential direction. This embodiment has the advantage to lower the static stresses supported by the first crown reinforcement cords.

5 The tires of the invention, being in a similar position as when mounted on their design mounting rims, inflated at a nominal pressure and unloaded, have preferably the outer contour of their crown portion having a transverse concave profile with a substantially constant radius of curvature over 1.0 meter.

10 The cords of the second crown reinforcement have advantageously a diameter D between 0.5 and 1.5 mm and preferably between 0.7 and 1.2 mm. Their laying pitch p is advantageously such that D/p is between 0.5 and 0.9 and preferably between 0.7 and 0.9.

15 Preferably the tensile strength of the second crown reinforcement cords at a strain of 2.5 % and a temperature of 180 Celsius degrees is inferior to 2 daN and preferably inferior to 1.5 daN. The tensile strength of the second crown reinforcement cords at a strain of 1 % and a temperature of 80 Celsius degrees is preferably superior to 2 daN. This ensures that the ratio τ is under 1 and that the effect of the second crown reinforcement at high speed, i. e. at high temperature and stress is really negligible in front of the rigidity of the first crown reinforcement.

20 Such cords can be chosen in the group of PET and PEN polyesters with preferably PET polyesters. Preferably, said PET polyesters have a stress-strain characteristic with two maxima of tangent modulus, the strain of the second maxima being over 12 % and preferably over 14 %.

25 An example of such cords are PET HMLS (high modulus low shrinkage) cords with a high temperature contraction potential (CS) under 1 %.

30 The high elastic modulus at high strain cords can comprise nylon yarns associated with aramid yarns. They can also comprise only aramid cords.

- 5 -

The substantially circumferential oriented cords are preferably helically wound. Advantageously, the laying diameters of said cords depart by less than 0.5 % from the final diameters of said cords in the tire after vulcanization.

- 5 The tire of the invention is advantageously built on a rigid core having a crown portion and side portions wherein the outer contour of the crown portion is substantially cylindrical. This has the advantage to lower the static belt breaker edges stresses.

BRIEF DESCRIPTION OF THE DRAWINGS

10

- Fig. 1 is a partial transverse cross section of a pneumatic tire according to the invention;
- Fig. 2 is a partial transverse cross section of a second embodiment of an inventive tire;
- Fig. 3 is a partial transverse cross section of a third embodiment of an inventive tire;
- Fig. 4 is a partial transverse cross section of a forth embodiment of an inventive tire;
- 15 - Fig. 5 is a partial transverse cross section of a five embodiment of an inventive tire;
- Fig. 6 is a diagram showing the ground contacting area of a prior art tire running at high speeds;
- Fig. 7 is a diagram showing the ground contacting area of the tire of the invention;
- Fig. 8 is a plot of stress versus elongation for four types of cords; and
- 20 - Fig. 9 is a plot of stress and tangent modulus versus strain for a PET cord.

DEFINITIONS

- 25 "Axial" and "axially" mean the lines or directions that are parallel to the axis of rotation of the tire.

"Circumferential" means lines or directions extending along the perimeter of the surface of the annular tread perpendicular to the axial direction.

- 30 "Equatorial plane (EP)" means the plane perpendicular to the tire's axis of rotation and passing through the center of its crown.

- 6 -

"Radial" and "radially" mean directions radially toward or away the axis of rotation of the tire.

5 "Cord" means both monofilaments and multifilaments, of assemblies such as cables, plied yarns or any other type of equivalent assemblies, and this regardless of the material or treatment of these cords, for example, surface treatment or coating or dipping to promote adhesion to the rubber mixes.

10 "Compound" means a rubber mix having one or more base elastomer and additives selected in accordance with the properties of the compound desired for the zone of the tire it is used.

"Modulus of elasticity" of a rubber mix means the extension secant modulus at a strain of
15 10 % and a temperature of 20 degrees Celsius.

"Linear density" applied to a cord is the weight in grams per 1000 meters of the cord, stated of units of "tex".

20 "Modulus of elasticity" of a cord at a given strain or stress means the extension secant modulus calculated at the given strain or stress. The units used for the stress on a cord or the modulus of elasticity of a cord are centi-newton per tex (cN/tex). A high elastic modulus is considered as a secant elastic modulus over 1000 cN/tex and a low elastic modulus is considered as a secant elastic modulus under 600 cN/tex.

25

"Tangent modulus of elasticity" of a cord at a given strain or stress means the extension tangent modulus of said cord. At a given stress or strain, the tangent modulus of elasticity is the value of the slope of the tangent to the stress-strain curve.

30 "Winding pitch, p" applied to a substantially circumferentially oriented cord which is helically wound particularly in a large-diameter helical having as its main axis the main

- 7 -

axis of the tire, is the transverse distance between the cord axes of the cords of two adjacent loops in the helical. "Laying density, d" is the reciprocal of the winding pitch and thus corresponds to the number of loops of a helically wound cord per unit axial length (along the main axis of the winding). Customarily, d is stated as the number of
5 cords per decimeter (units of 1/dm), and p is stated in units of millimeters. Thus $p = 100/d$.

The "high-temperature contraction potential" called "CS" means the relative variation of length of a dipped cord positioned, under a prestress equal to the half-sum of the titers of
10 each of the elementary fibers, between the shelves of an oven (TESTRITE type) regulated at a constant temperature of $185 \pm 0.5^\circ\text{C}$. The CS is expressed in % by the following formula: $\text{CS (\%)} = 100 \times |L_1 - L_0| / L_0$ where L_0 is the initial length of the dipped cord at room temperature under a prestress equal to the half-sum of the titers of each of the elementary fibers and L_1 the length of that same cord at 185°C . The length L_1
15 is measured at the end of a stabilization time of the cord at temperature of 185°C equal to $120 \text{ s} \pm 2\%$. The standard deviation on the CS measurement is $\pm 0.15\%$.

That potential is the direct consequence of the series of operations that the reinforcements underwent on its manufacture or on its use.

20

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 is a partial transverse cross section of a pneumatic tire 1 according to the invention. This tire comprises a crown 2 extending to sidewall 3 and bead 4. The bead 4
25 has a seat 5 adapted to fit on the tire's design mounting rim 6. The crown comprises a breaker belt 7.

The tire comprises a carcass structure 8, extending from bead to bead or leaving a gap between two half structures, for instance in the substantially median portion of the crown.
30 The radially inwardmost extent of the carcass structure 8 terminates in an anchoring zone 9 of the bead 4. In the embodiment of Figure 1, the carcass structure is not turned up

- 8 -

around bead cores or other bead reinforcement. The carcass structure is anchored in the bead portion by bead reinforcement. A preferred embodiment of such reinforcement comprises a cord arrangement provided with at least one substantially circumferentially oriented cord 11 laterally bordering the carcass structure on at least one side. In the
5 embodiment of figure 1, there are two circumferentially oriented cord windings 10 and 11 laterally bordering the carcass structure 8 on both sides. In this instance "anchored" in the bead portion means that the arrangement resists the tension developed in the carcass structure during inflated or deflated use of the tire by the adherence of the carcass reinforcing structure laterally with the cords 10 and 11 rather than being wound around a
10 traditional bead core.

The mechanical properties of the anchoring zone 9 are optimized in using a bead filler having a very high creeping resistance at high stress and temperature.

15 Other examples of carcass anchorings or dispositions of the carcass layers in the bead portion have been disclosed in US 5,660,656 to Herbelleau et al and are incorporated herein by reference.

20 The tire of the invention advantageously utilizes a bead anchoring as described, but the carcass structure may also be turned up around bead cores.

The crown 2 comprises:

- a carcass structure 8;
- a breaker belt 7 disposed radially outside the carcass structure 8 and having in this
25 embodiment two crossed plies 12, 13 of high elastic modulus at high stress cords, laid at angles α , β , from 27 to 37 degrees with respect of the circumferential rolling direction in parallel to each other but crosswise to the cords of the next ply, here α , β are in the order of +33 and -33 degrees, respectively; these cords are advantageously made of steel but aramid cords can also be used;
- 30 - an outer full-width ply 14 having cords substantially oriented in the circumferential direction made of high elastic modulus at high stress organic fiber cord;

- 9 -

- two edge plies 15 made of high elastic modulus at high stress cords, which are substantially circumferentially oriented;
- a center ply 16 made of low elastic modulus at high stress fiber cord oriented substantially in the circumferential direction and placed in the center part of the crown;
- 5 and
- a tread 17 with a central rib 18.

The carcass structure is substantially oriented radially, i.e. at 90 degrees to the circumferential direction. The ply 16 is advantageously placed axially under the central
10 rib 18 of the tread 17.

The plies 14 and 15 are made of high elastic modulus at high stress cords, which are helically wound in order to ensure a good stiffening hoop effect of the crown 2. These plies are preferably made of aramid cords, hybrid cords that associate nylon yarn and
15 aramid yarns may also be used. The pitch p of these plies is determined in order to have a very good high-speed durability.

The center ply 16 is made of a low elastic modulus at high stress cord, which is also helically wound. This cord is preferably a thermally contractible cord such as PET.
20 Nylon cord may also be used.

When the tire is mounted on its design mounting rim 6, inflated to its nominal pressure but unloaded, the full-width ply 14, in combination with the edge plies 15, the center ply 16 and the angles α and β of the two crossed plies, provide the outer contour of the
25 crown with a concave curvature which is substantially constant. The value of the radius of curvature R is about or over 1 meter. When loaded, the resulting ground contact area form 20 is substantially rectangular or slightly oval shaped as illustrated in Fig. 7. It has been found that such a rectangular shape 20 provides the tire with very good low or medium speeds dry handling and wear performances and good wet handling
30 performances.

- 10 -

When the tire speed increases and reaches very high speeds, the centrifugal forces become very high, accordingly, the cords and the pitch p of the plies 14 and 15 are determined in order to be able to resist to these forces and to provide the ground contacting area with substantially always a rectangular/oval shape as presented in Fig. 7.

- 5 This shape provides the tire with a very good high-speed durability.

The very high speed running of the tire imparts a high temperature in the crown due to the hysteresis of the compounds of the tire and notably of the tread. At this high temperature and under the high loads and stresses due to the high centrifugal forces, the stiffness of the center ply 16 becomes nearly negligible in front of the high stiffness of the high modulus plies 14 and 15. As a consequence, the additional crown reinforcement does not limit the length of the centerline (intersection with EP) of the ground contacting area of the tire.

- 15 Accordingly, the combination of the characteristics of the plies in the crown of the inventive tire provides it with an improved dry handling and wear performances at low and medium speeds while retaining a very good high-speed durability.

Fig. 2 presents a second embodiment of a tire 30 according to the invention in which the full-width ply 14 is placed radially under the breaker belt 7. This position improves the efficiency of the hoop effect of the circumferentially oriented cords of the ply 14.

Fig. 8 presents the stress-elongation curves of four cords:

- curve a: nylon cord (two yarns of nylon);
- 25 - curve b: aramid cord (two aramid yarns);
- curve c: aramid-nylon cord; and
- curve d: polyester (PET) cord.

The nylon cord (curve a) is a dipped cord of 441 tex made from two identical nylon yarns of 210 tex individually twisted at 200 t/m in a first direction then simultaneously twisted at 200 t/m in the opposite direction. The initial modulus of elasticity of this cord is

- 11 -

530 cN/tex, the stress at a 4 % elongation is 10 cN/tex and its modulus of elasticity at this strain is 250 cN/tex. Thus the modulus of elasticity of this cord is low at low deformations as well as at appreciable deformations or stresses.

- 5 The aramid cord (curve b) is a dipped cord of 376 tex made from two identical aramid yarns of 167 tex individually twisted at 440 t/m in a first direction then simultaneously twisted at 440 t/m in the opposite direction. The initial modulus of elasticity of this cord is 2030 cN/tex, the stress at a 4% elongation is 80 cN/tex and its modulus of elasticity at this strain is 2000 cN/tex. This cord is characterized by a high modulus of elasticity at
10 low and high stresses.

- The aramid-nylon cord (curve c) is a dipped cord, which has a linear density of 521 tex. It is made from two identical aramid yarns of 167 tex individually twisted at 280 t/m (turns per meter) in a first direction and from one yarn of 140 tex twisted at 280 t/m in
15 the same direction, these three yarns being further simultaneously twisted at 280 t/m in the opposite direction. The initial modulus of elasticity of this cord is 740 cN/tex, the stress developed at a 4 % elongation is 50 cN/tex and the modulus of elasticity at this strain is 1250 cN/tex. This cord has a medium modulus of elasticity at low elongation but a high modulus at high stress or elongation.

20

- The PET cord (curve d) is a dipped cord, which has a linear density of 680 tex. It is made from four identical PET yarns of 167 tex. In a first stage, the yarns are assembled and twisted two by two at 200 t/m (turns per meter) in a first direction, then simultaneously twisted at 200 t/m in the opposite direction. The initial modulus of
25 elasticity of this cord is 750 cN/tex but the stress developed at a 4% elongation is 20 cN/tex, the modulus of elasticity at this strain of 4 % is 500 cN/tex. This cord has a medium modulus of elasticity at low elongation and a low modulus at high stresses or elongation.

- 30 The following table 1 gives the mechanical properties of these four cords at 20 Celsius degrees:

Table 1

Cord	Nylon (a)	Aramid (b)	Aramid-nylon (c)	PET (d)
Initial modulus of elasticity (cN/tex)	530	2030	740	750
Modulus of elasticity at 4 % strain (cN/tex)	250	2000	1250	500

5 The curves b and c illustrate the behavior of cords that may be used for the full-width ply and the edge plies of the crown. The high modulus of elasticity of these cords allows them to very well support the high centrifugal forces without the necessity of a high linear density of plies or of numerous plies.

10 The curves a and d illustrate the behavior of cords that may be used for the additional crown reinforcement. The pitch used for the center ply is determined in order to allow this ply to have a significant flattening influence on the transverse curvature of the crown of the tire at low or medium operating speeds. Obviously, the PET cord is preferable due to its higher low elongation modulus.

15 At high stresses or high strains, the cords a and d have a much lower modulus of elasticity than the aramid cords (curves b and c). This explains that the influence of the additional crown reinforcement is nearly negligible at very high speed running conditions. The difference is further increased by the different behavior of the nylon an PET cords with temperature. These curves are obtained at 20 Celsius degrees. At high
20 temperatures, such as the temperatures reached in very high speed running conditions, these cords have an important diminution of their modulus of elasticity at high (and low) stresses. On the contrary, the aramid cords encounter a much lower decrease.

- 13 -

To demonstrate the invention, two 225/55 17 Pilot Sport® A/S model tires were manufactured, one with and one without an additional center crown reinforcement. The test results are presented in the following table 2.

5

Table 2

Center ply	Wear resistance	Subjective Wet handling	Subjective Dry handling	Inflated R (m)
No	100	100	100	0.6
PET	125	100	110	1.3

The tire according to the invention presents a very good wear resistance and subjective dry handling performances. It has also a good subjective wet handling performance similar to the performance of the reference tire.

10

It is advantageous to build the tire of the invention on a rigid support, for instance a rigid core imposing the shape of its inner cavity. All the components of the tire, which are disposed directly in their final place, are applied onto this core in the order required by the final architecture, without undergoing shaping at any moment of the building. In this case, the tire can be molded and vulcanized in the manner explained in US 4,895,692.

15

While the invention has been described in combination with embodiments thereof, it is evident that many alternatives, modifications, and variations will be apparent to those skilled in the art in light of the foregoing teachings. Accordingly, the invention is intended to embrace all such alternatives, modifications and variations as fall within the spirit and scope of the appended claims.

20

- 14 -

What is claimed:

1. A tire comprising a crown extended by two respective sidewalls and two respective beads, a carcass structure anchored in each side of the tire in said beads, said crown
5 comprising:
 - at least one reinforcing ply having parallel reinforcements oriented at an angle α relative to the circumferential direction ranging between 10 and 45 degrees,
 - a first crown reinforcement having cords substantially oriented in the circumferential direction and being high elastic modulus at high stress organic fiber cords; and
 - 10 - a second crown reinforcement having cords substantially oriented in the circumferential direction and having a ratio τ of the tensile strength at high strain and high temperature to the tensile strength at low strain and moderate temperatures inferior to 1.5.
2. The tire of claim 1, wherein $\tau < 1.0$.
- 15 3. The tire of claim 1, wherein $\tau < 0.8$.
4. A tire according to claim 1, wherein the second crown reinforcement is placed axially in the center part of the crown.
- 20 5. A tire according to claim 1, wherein said second crown reinforcement is placed radially outside the first crown reinforcement.
6. The tire of claim 5, wherein, said crown having radially outwardly a tread with a pattern comprising a central rib, said second crown reinforcement is placed axially under
25 said rib.
7. A tire according to claim 1, wherein, the first crown reinforcement having two lateral parts, the second crown reinforcement is placed axially between said two lateral parts.
- 30

- 15 -

8. A tire according to claim 1, wherein the first and second crown reinforcements are alternately placed at substantially the same distance from the axis of rotation of the tire.
9. A tire according to claim 1, wherein the at least one reinforcing ply having parallel
5 reinforcements oriented at an angle α relative to the circumferential direction is inserted radially between the first and second crown reinforcements.
10. The tire of claim 9, wherein the first crown reinforcement is placed radially outwardly the at least one reinforcing ply having parallel reinforcements oriented at an
10 angle α relative to the circumferential direction.
11. The tire of claim 9, wherein the second crown reinforcement is placed radially outwardly the at least one reinforcing ply having parallel reinforcements oriented at an angle α relative to the circumferential direction.
15
12. A tire according to claim 1, wherein the crown further comprises a pair of axially spaced edge plies.
13. The tire of claim 12, wherein said pair of axially spaced edge plies is made of cords
20 of high elastic modulus at high stress and is substantially circumferentially oriented.
14. A tire according to claim 1, wherein said crown comprises two crossed reinforcing plies of high elastic modulus cords laid at an inclination angle from 27 to 37 degrees with respect to the circumferential direction.
- 25
15. A tire according to claim 1, wherein, the tire being in a similar position as when mounted on its design mounting rim, inflated at a nominal pressure and unloaded, the outer contour of the crown portion of the tire has a transverse concave profile with a substantially constant radius of curvature over 1.0 meter.
- 30

- 16 -

16. A tire according to claim 1, wherein the second crown reinforcement cords have a diameter D between 0.5 and 1.5 mm and preferably between 0.7 and 1.2 mm.

17. A tire according to claim 1, wherein, the second crown reinforcement cords having a diameter D, said second crown reinforcement cords are placed with a laying pitch p such that D/p is between 0.5 and 0.9 and preferably between 0.7 and 0.9.

18. A tire according to claim 1, wherein the tensile strength of the second crown reinforcement cords at a strain of 2.5 % and a temperature of 180 Celsius degrees is inferior to 2 daN and preferably inferior to 1.5 daN.

19. A tire according to claim 1, wherein the tensile strength of the second crown reinforcement cords at a strain of 1 % and a temperature of 80 Celsius degrees is superior to 2 daN.

20. A tire according to claim 1, wherein the second crown reinforcement cords are chosen in the group of the PET and PEN polyesters.

21. The tire of claim 20, wherein the second crown reinforcement cords are PET polyester cords.

22. The tire of claim 21, wherein said PET polyester cords have a stress-strain characteristic with two maxima of tangent modulus, the strain of the second maxima being over 12 % and preferably over 14 %.

23. The tire of claim 22, wherein the second crown reinforcement cords are PET HMLS cords with a high-temperature contraction potential under 1 %.

24. A tire according to claim 1, wherein said high elastic modulus at high strain cords comprise nylon yarn associated with aramid yarn.

- 17 -

25. A tire according to claim 1, wherein said high elastic modulus at high strain cords comprise aramid cords.

26. A tire according to claim 1, wherein the substantially circumferential oriented cords
5 are helically wound.

27. The tire of claim 26, wherein said substantially circumferential oriented cords are helically wound with laying diameters departing by less than 0.5 % from the final diameters of said cords in the tire after vulcanization.

10

28. A tire according to claim 1, wherein said tire is built on a rigid core having a crown portion and side portions, and wherein the outer contour of said crown portion of the core is substantially cylindrical.

15 29. A tire according to any one of claims 1 to 28, wherein a high elastic modulus is a secant elastic modulus over 1000 cN/tex.

1/6

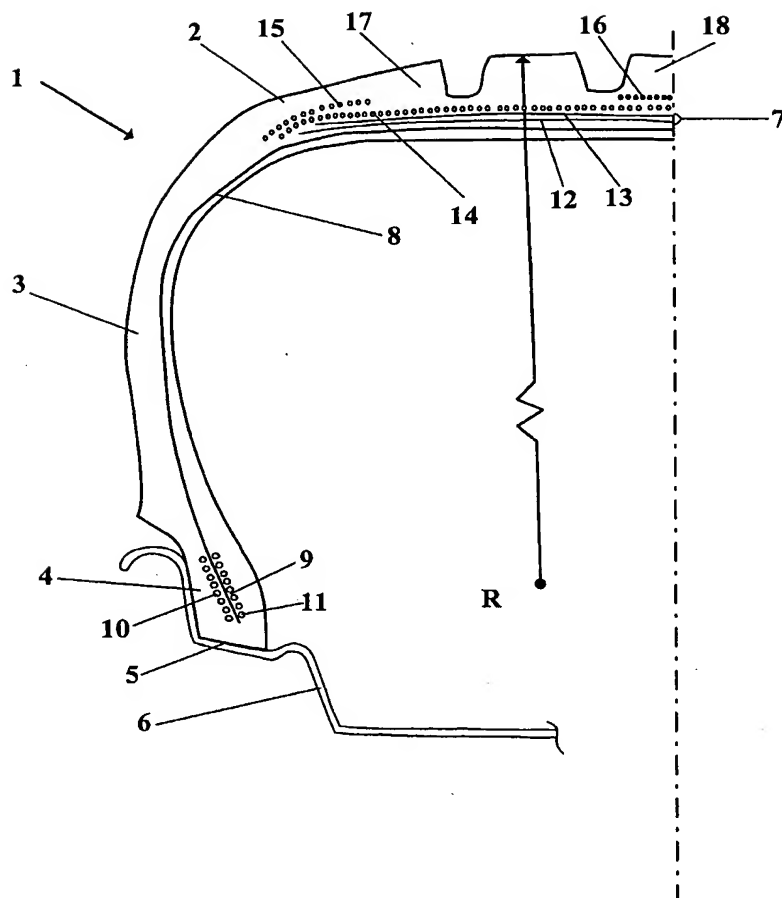


Fig. 1

2/6

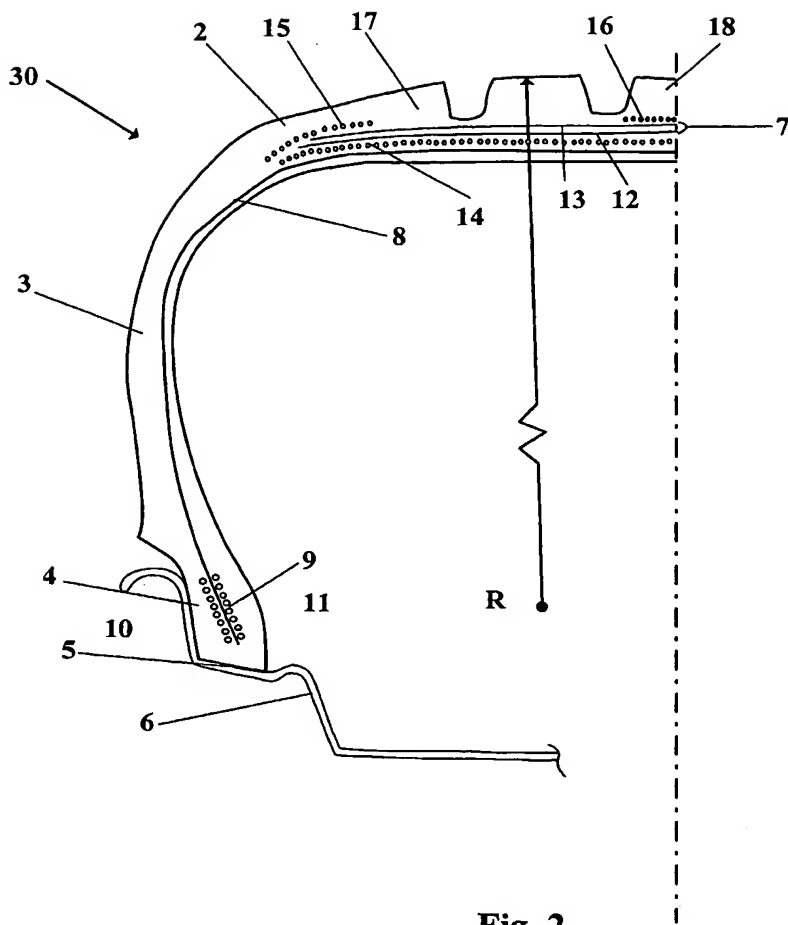


Fig. 2

3/6

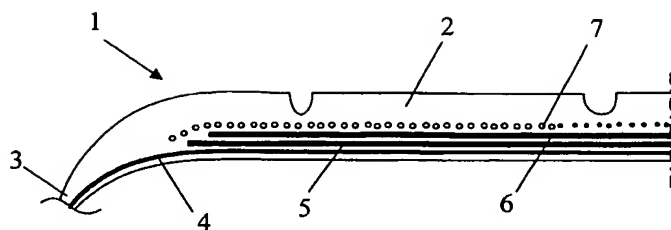


Fig. 3

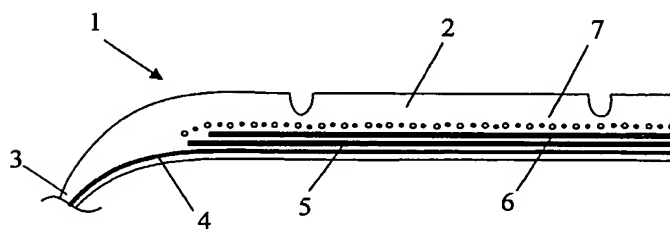


Fig. 4

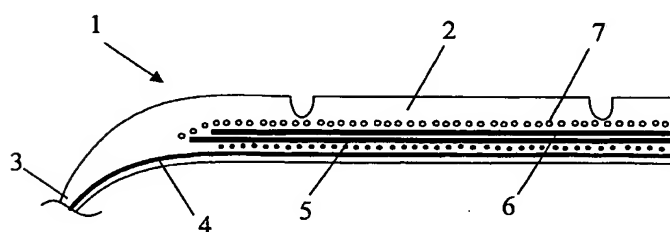


Fig. 5

4/6

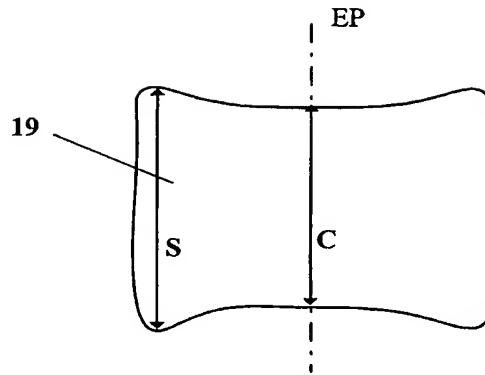


Fig. 6

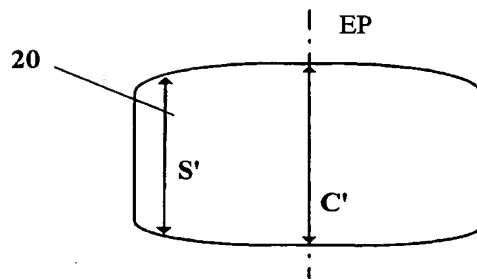


Fig. 7

5/6

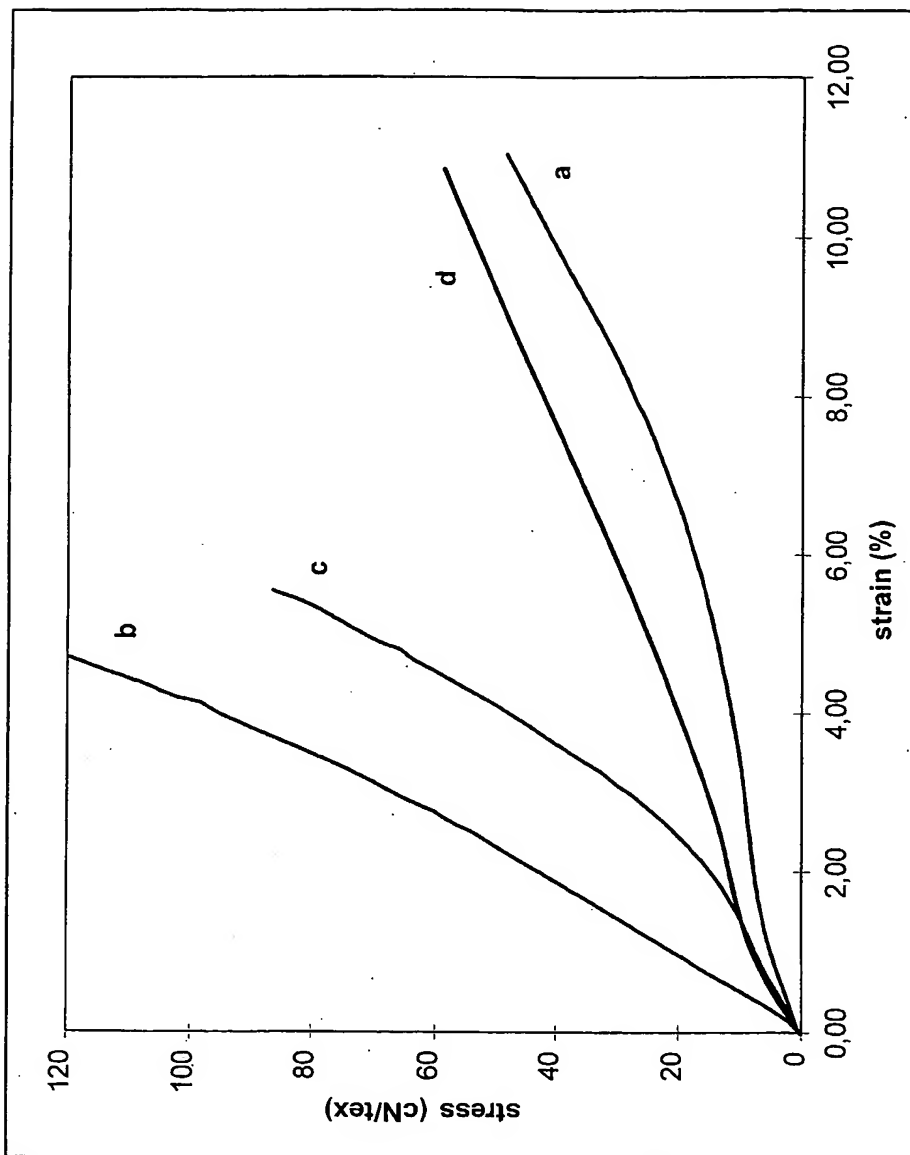


Fig. 8

6/6

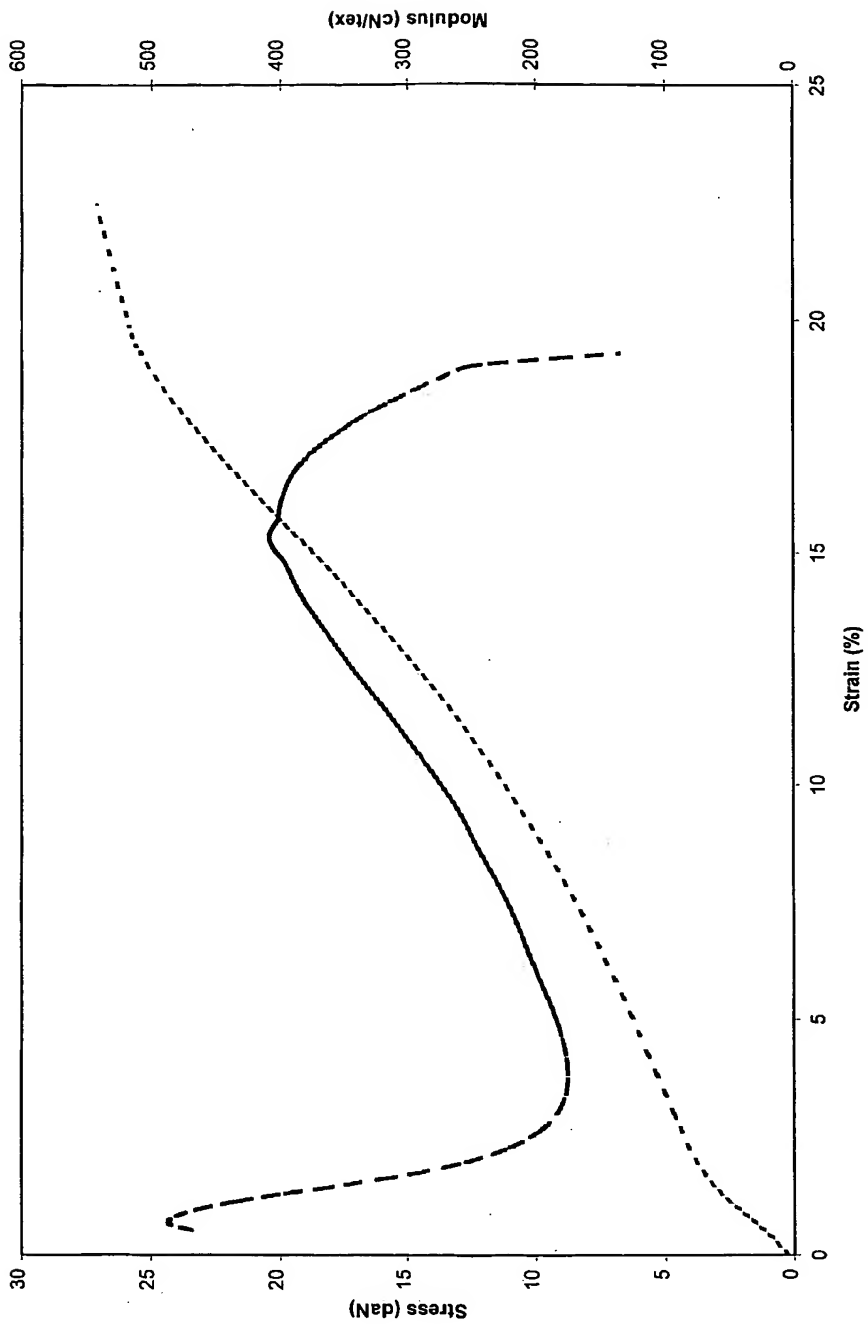


Fig. 9

INTERNATIONAL SEARCH REPORT

PCT/US 02/10929

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B60C9/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 335 588 A (SUMITOMO RUBBER IND) 4 October 1989 (1989-10-04) page 5, line 18 - line 21; figure 6; example 4; table 1A ---	1-8, 12-14, 16, 17, 24, 26-29
X	EP 0 790 143 A (SUMITOMO RUBBER IND) 20 August 1997 (1997-08-20) cited in the application claims; table 2 page 4, line 28 - line 57 ---	1-4, 24-29
A	EP 0 346 106 A (SUMITOMO RUBBER IND) 13 December 1989 (1989-12-13) page 3, line 40 - page 4, line 40; figures 9-12 --- -/--	1, 9-11, 15

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

28 November 2002

Date of mailing of the international search report

05/12/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Baradat, J-L

INTERNATIONAL SEARCH REPORT

PCT/US 02/10929

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 698 510 A (SP REIFENWERKE GMBH) 28 February 1996 (1996-02-28) column 10, line 29 -column 11, line 23; figures 37,38 ---	1,4,8, 20-23
A	EP 0 749 854 A (BRIDGESTONE CORP) 27 December 1996 (1996-12-27) ---	
A	WO 01 15918 A (WINTER HANS JOACHIM ;DUNLOP GMBH (DE); MIYABE SABURO (DE); REIHL K) 8 March 2001 (2001-03-08) page 6; figure 2 -----	6

INTERNATIONAL SEARCH REPORT

PCT/US 02/10929

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0335588	A	04-10-1989	JP 1247204 A	03-10-1989
			JP 2757940 B2	25-05-1998
			DE 68903414 D1	17-12-1992
			DE 68903414 T2	25-03-1993
			EP 0335588 A2	04-10-1989
EP 0790143	A	20-08-1997	JP 3113592 B2	04-12-2000
			JP 9277803 A	28-10-1997
			DE 69702460 D1	17-08-2000
			DE 69702460 T2	23-11-2000
			EP 0790143 A1	20-08-1997
EP 0346106	A	13-12-1989	US 6058996 A	09-05-2000
			JP 1309805 A	14-12-1989
			AU 619848 B2	06-02-1992
			AU 3610989 A	14-12-1989
			CA 1330930 A1	26-07-1994
EP 0698510	A	28-02-1996	DE 3868725 D1	09-04-1992
			EP 0297889 A2	04-01-1989
			EP 0346106 A1	13-12-1989
			US 4930559 A	05-06-1990
			US 5200006 A	06-04-1993
EP 0749854	A	27-12-1996	DE 4429899 A1	29-02-1996
			DE 19506381 A1	29-08-1996
			DE 19509824 A1	19-09-1996
			DE 69509323 D1	02-06-1999
			DE 69509323 T2	26-08-1999
WO 0115918	A	08-03-2001	EP 0698510 A2	28-02-1996
			JP 3145902 B2	12-03-2001
			JP 8175104 A	09-07-1996
			US 5795417 A	18-08-1998
			JP 9066705 A	11-03-1997
EP 0749854	A	27-12-1996	DE 69605605 D1	20-01-2000
			DE 69605605 T2	31-05-2000
			EP 0749854 A1	27-12-1996
			ES 2140028 T3	16-02-2000
			US 5931211 A	03-08-1999
WO 0115918	A	08-03-2001	DE 19941339 A1	01-03-2001
			AU 6841000 A	26-03-2001
			WO 0115918 A1	08-03-2001
			EP 1124696 A1	22-08-2001
			JP 2001071710 A	21-03-2001